



00600A122E601G

Adapter

18GHz 50Ω SMA(M)–SMP(F) Adapter/Stainless

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.2:1(Max.)
Impedance	50Ohm
Connection 1	SMP Female
Connection 2	SMA Male

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Stainless Steel	Passivated
Contact Pin	Beryllium Copper	Gold
Insulator	PTFE	
Outer Contact	Beryllium Copper	Gold
Retainer Ring	SUS304	Passivated
Gasket	Silicone Rubber	Red
Shell	Stainless Steel	Passivated

Outling Drawing (Unit:mm)

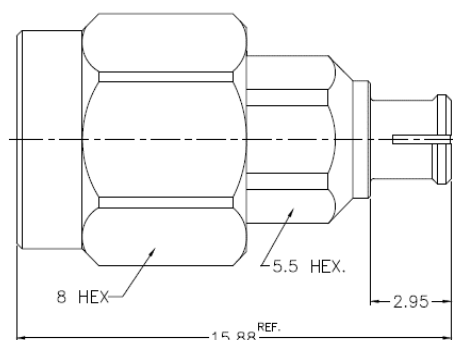

Test Report

