



00600A1N1NB01L

Adapter



10GHz 50Ω N(M)–SMA(M) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

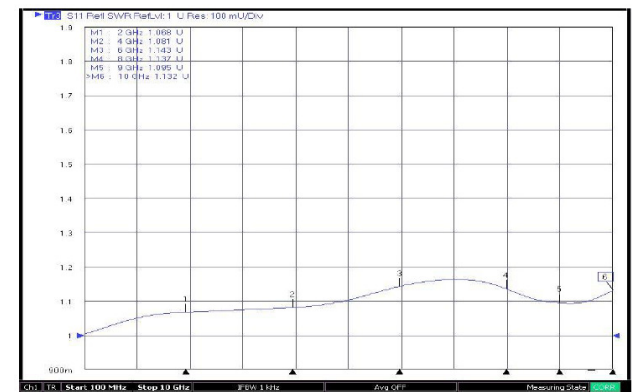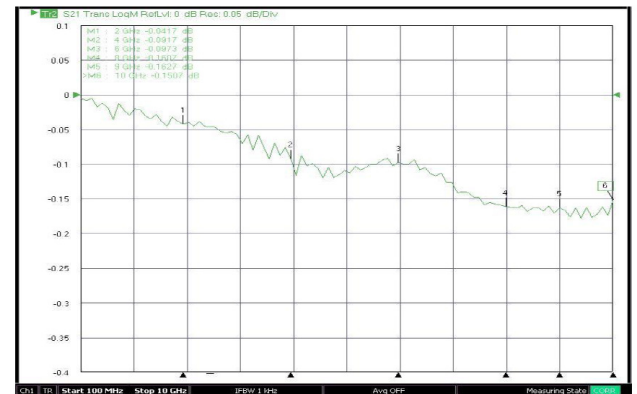

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	N Male

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Electroless Nickel
Center Pin	Brass	Gold
Insulator	PTFE	
N C-Ring	SUS304	
SMA C-Ring	Beryllium Copper	
Gasket	Silicone	
Shell	Brass	Electroless Nickel

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

