



00600A2NAN501G

Adapter

12GHz 50Ω Quick N(M)–SMA(F) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-12GHz
VSWR	1.25:1(Max.)
Impedance	50Ω
Connection 1	Quick N Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental


Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
Contact Bldy	Brass	Nickel

Outling Drawing (Unit:mm)

DIMENSIONS	TOLERANCES
0.5~6mm	±0.2
6~30mm	±0.4
30~120mm	±0.6
120~315mm	±1.0
315~1000mm	±1.6
1000~2000mm	±2.4

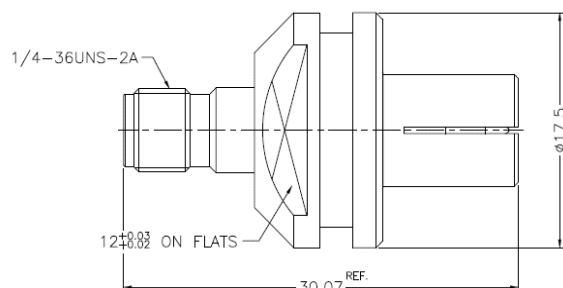

Test Report

