



# 00600A2T3N4016

## Adapter

### 11GHz 50Ω SMA(F)–Reverse TNC(M) Adapter/Nickel

#### Features

- ✓ High Repeatability
- ✓ Low VSWR



#### Electrical Specifications

|              |                  |
|--------------|------------------|
| Frequency    | DC-11GHz         |
| VSWR         | 1.35:1(Max.)     |
| Impedance    | 50Ω              |
| Connection 1 | SMA Female       |
| Connection 2 | Reverse TNC Male |

#### Mechanical

|            |            |
|------------|------------|
| Durability | 500 Cycles |
|------------|------------|


#### Environmental

|                       |            |
|-----------------------|------------|
| Operating Temperature | -55°C~85°C |
|-----------------------|------------|

#### Material

| Part         | Material        | Plated |
|--------------|-----------------|--------|
| Body         | Brass           | Nickel |
| Center Pin   | Phosphor Bronze | Gold   |
| Insulator    | PTFE            |        |
| Coupling Nut | Brass           | Nickel |
| Gasket       | Silicone        |        |
| Washer       | Brass           | Nickel |

#### Outling Drawing (Unit:mm[inch])

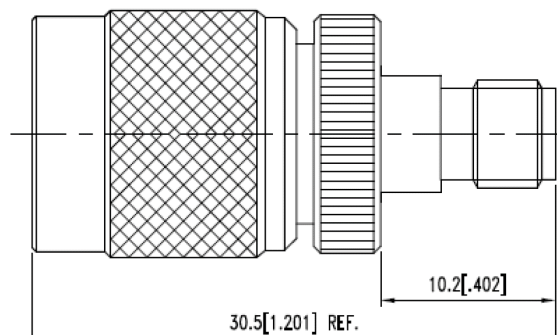

#### Test Report

