



0060A724N-XXXX

Testing Probe

**6GHz 50Ω SMA(F)-Tip 2pin 2Hole
Probe Adapter (Pitch :3mm : PIN :
1.5mm)**

Features

- High Repeatability
- Low VSWR




Test Report

Electrical Specifications

Frequency	DC-6GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

Material

Part	Material	Plated
Signal Conductor	Brass	Gold
Shielding Plunger	Beryllium Copper	Gold
Insulator	Teflon	
Shielding Tube	Brass	Gold
SMA Body	Brass	Gold

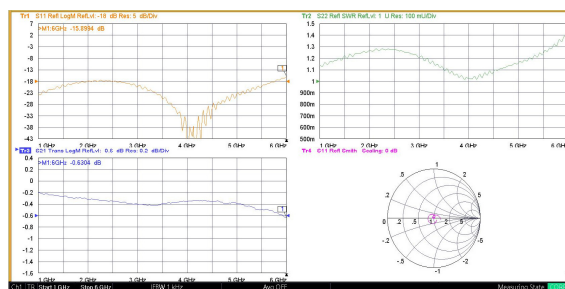

Mechanical

	8K Cycles
	※内針可被更換次數:10次
Spring Force	Signal Conductor:90g ± 20% at 0.60mm Shielding Plunger:90g ± 20% at 0.60mm

Outling Drawing (Unit:mm)

Total Length:±0.3mm

DIMENSIONS	TOLERANCES
.X	±0.20
.XX	±0.10
.XXX	±0.05
.X'	±1'

