





0060WN2H0BE01X

Waveguide Adapter

3.2-4.9GHz 50Ω N(F)- WR229(UDR40) Waveguide Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	3.2-4.9GHz
VSWR	1.20:1(Max.)
Insertion Loss	0.3dB(Max.)
Waveguide Size	WR229
Waveguide Flange	UDR40
Coaxial Connection	N Female


Mechanical

Durability	500 Cycles
------------	------------



Material

Material	Inner Finishing	Coating
Brass	Nickel	Blue Paint

Outling Drawing (Unit:mm)

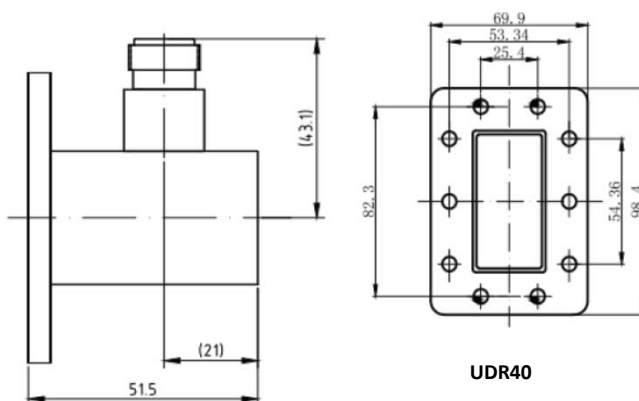

Test Report

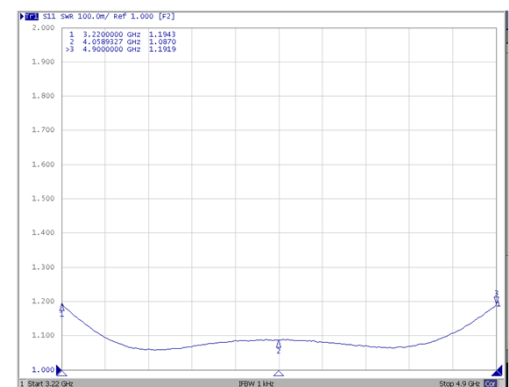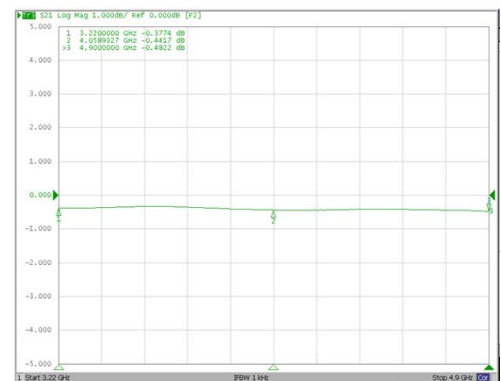

In IL test setup, two Waveguide to Coax Adapters are connected together.

The test result is the total IL of two Waveguide to Coax Adapters.

In calculation, dividing this result by 2 can get single Waveguide to Coax Adapter's IL.

All Specification Changed Without Notification.