



00800A1G10H-XX

Attenuator

6GHz SMA 100W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
Standard Values	6, 10, 20, 30, 40dB
Attenuation Accuracy	6, 10, 20 dB: $\pm 0.8\text{dB}$ 40dB: $\pm 1.0\text{dB}$
VSWR	1.25:1(Max.)
Power	100W(Avg.)@25°C
Impedance	50Ohm
Input Connection	SMA Male
Output Connection	SMA Female

Mechanical


Durability	500 Cycles
------------	------------

Environmental



Operating Temperature	-55°C~125°C
-----------------------	-------------

Test Report

6dB

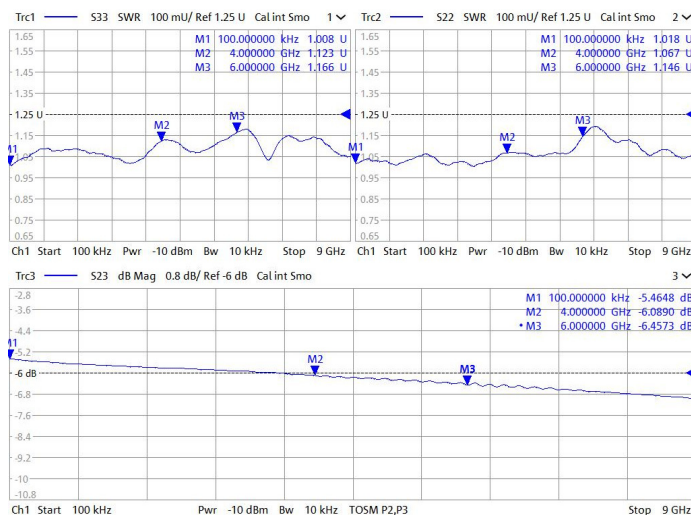

Outling Drawing (Unit:mm)

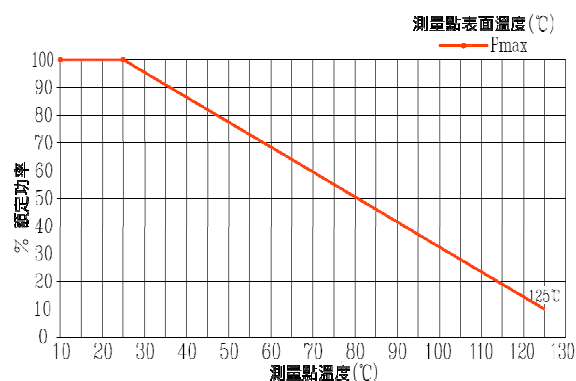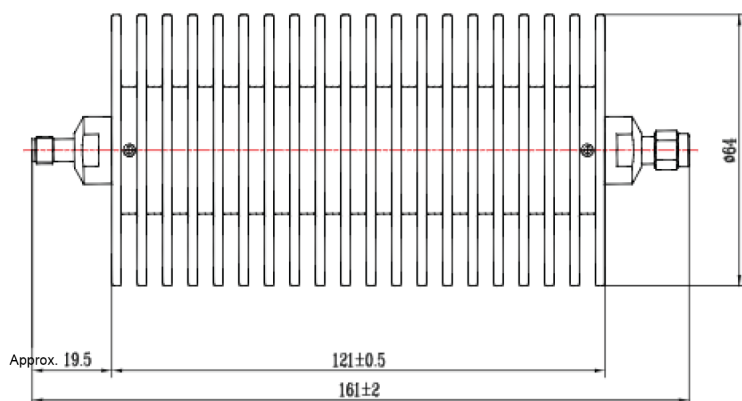

All Specification Changed Without Notification.