



00802N1A07H-XX

Attenuator

1GHz N(F-F) 150W Fixed Attenuator

Features

- Small Size
- Low VSWR

Electrical Specifications

Frequency	DC-1GHz
Standard Values	3,6,10,20,30,40,50dB
Attenuation Accuracy	6,10,20 dB: ± 0.7 dB 3,30dB: ± 0.8 dB 40,50dB: ± 0.9 dB
VSWR	1.2:1(Max.)
Average Power	Fwd.150W@25°C
Impedance	50Ohm
Connection 1	N Female
Connection 2	N Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental



Operating Temperature	-55°C~125°C
-----------------------	-------------

Material


Part	Material	Plated
Connector	Brass	Nickel

Outling Drawing (Unit:mm)

6,10,20,30,40,50dB

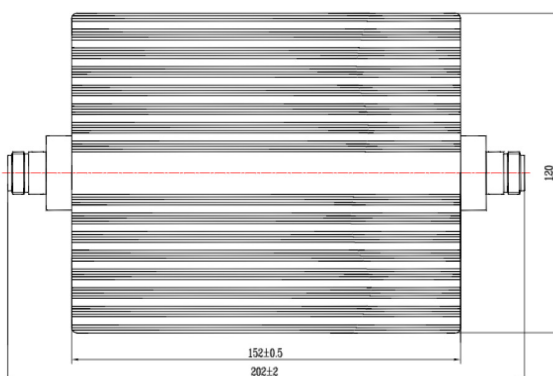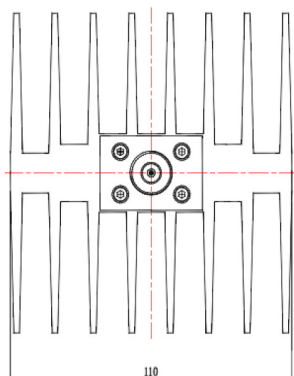

3dB

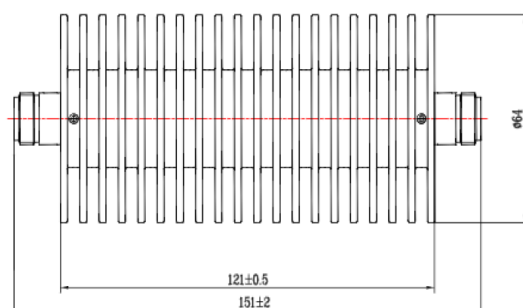

Test Report

3dB:

