



0110WB5401B-11

Waveguide Coupler

26.5-40GHz WR28(UBR320) 11dB
10W Waveguide Coupler

Features

- ✓ Low VSWR
- ✓ High Directivity



Electrical Specifications

Frequency	26.5-40GHz
Coupling	11±1dB
VSWR	Primary:1.05:1(Max.) Secondary:1.15:1(Max.)
Insertion Loss	0.3dB
Directivity	30dB(Min.)
Power Handling	10W
Waveguide Size	WR28
Waveguide Flange	UBR320

Mechanical

Durability	500 Cycles
Length	200mm


Environmental

Operating Temperature	-20°C~60°C
-----------------------	------------

Material

Material	Inner Finishing	Coating
Brass	Gold	Blue Paint

Outling Drawing (Unit:mm)

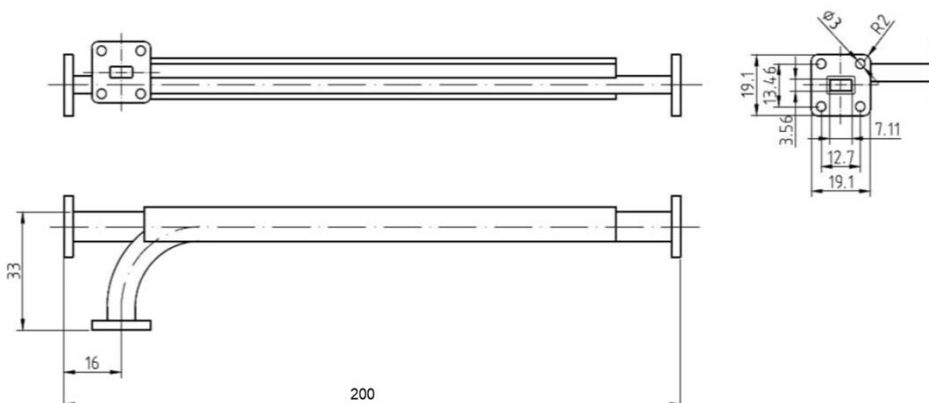

Test Report

