

0130A17153001B

Circulator

1.5–3GHz 17dB A:10W/P:100W
I/L0.5dB VSWR:1.4 SMA CW
Circulator

Features

- Optional removable connectors for assembly integration
- Low VSWR
- High Isolation



Electrical Specifications

Frequency	1.5-3GHz
Isolation	17dB(Min.)
VSWR	1.4:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:10W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-20~+60°C
-----------------------	-----------

Outling Drawing (Unit:mm)

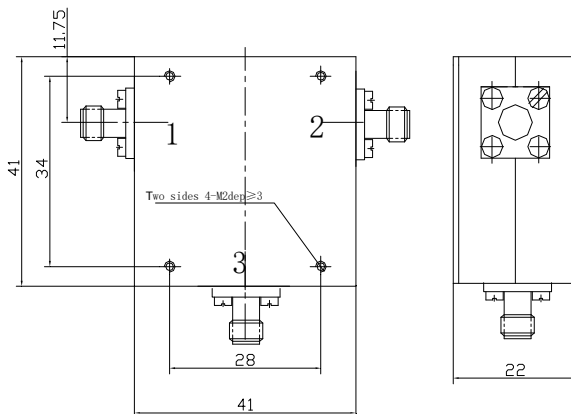

Test Report

