



0130A17204001P

Circulator

**2-4GHz 17dB A:100W I/L0.6dB
VSWR:1.35 SMA CW Circulator**

Features

- ✓ Optional removable connectors for assembly integration
- ✓ Low VSWR
- ✓ High Isolation



Test Report



Electrical Specifications

Frequency	2-4GHz
Isolation	17dB(Min.)
VSWR	1.35:1(Max.)
Insertion Loss	0.6dB(Max.)
Impedance	50Ohm
Power	Forward:100W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	0~+60°C
-----------------------	---------

Outling Drawing (Unit:mm)

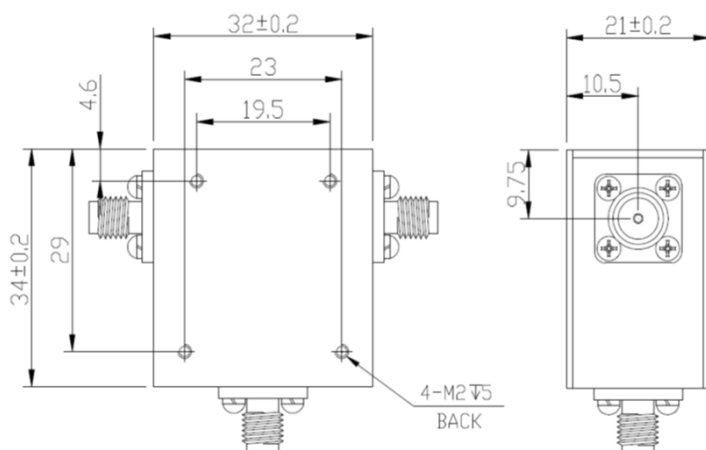

All Specification Changed Without Notification.