



0130A19204001R

Circulator

**2-4GHz 19dB A:100W I/L0.5dB
VSWR:1.25 SMA CW Circulator**

Features

- ✓ High Repeatability
- ✓ Low VSWR
- ✓ High Isolation

Electrical Specifications

Frequency	2-4GHz
Isolation	19dB(Min.)
VSWR	1.25:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:100W(CW)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	0~+60°C
-----------------------	---------

Outling Drawing (Unit:mm)

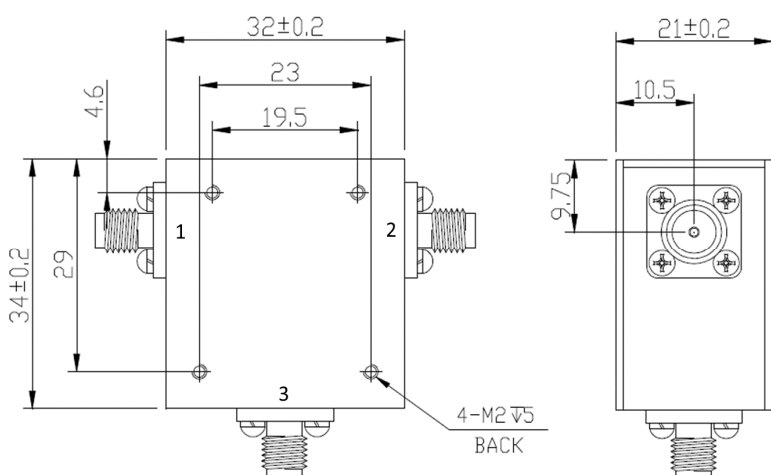

Test Report

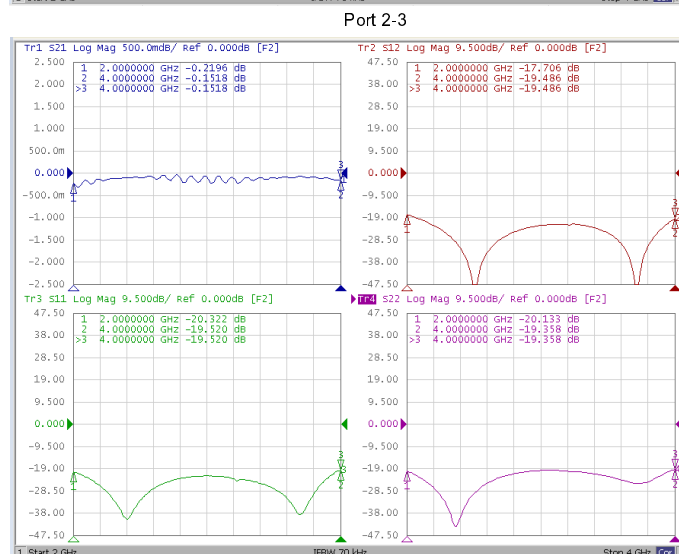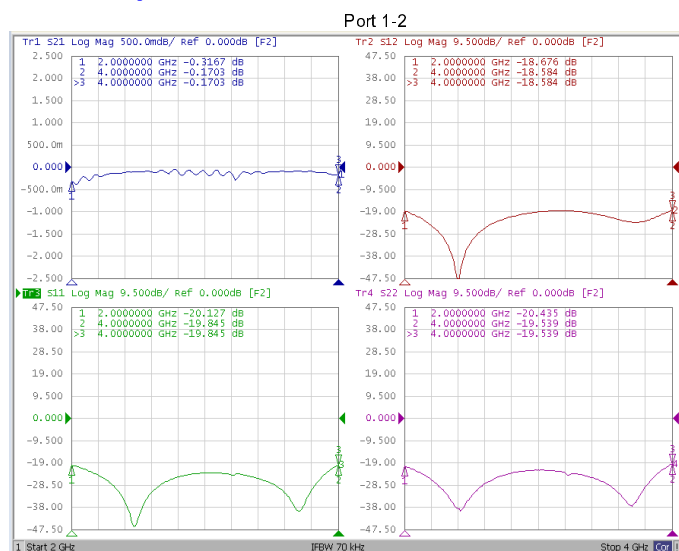

All Specification Changed Without Notification.