



0130A20081001R

Circulator

**0.8–1GHz 20dB A:100W I/L0.4dB
VSWR:1.2 SMA CW Circulator**

Features

- ✓ Optional removable connectors for assembly integration
- ✓ Low VSWR
- ✓ High Isolation

Electrical Specifications

Frequency	800-1000MHz
Isolation	20dB(Min.)
VSWR	1.2:1(Max.)
Insertion Loss	0.4dB(Max.)
Impedance	50Ohm
Power	Forward:100W(CW)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-30~+75°C
-----------------------	-----------

Outling Drawing (Unit:mm)

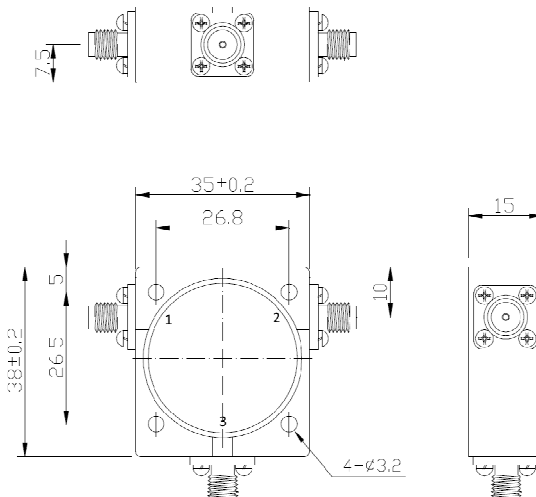

Test Report

