





0140A18040001R

Isolator

**470-620MHz 18dB A:100W I/L0.5dB
VSWR:1.3 SMA CW Isolator**

Features

- ✓ Optional removable connectors for Assembly integration
- ✓ Low VSWR
- ✓ High Isolation



Electrical Specifications

Frequency	470-620MHz
Isolation	18dB(Min.)
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Power	Forward:100W(Avg.) Reverse:20W(Avg.)
Connection	SMA Female
Direction	Clockwise


Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-30~+75°C
-----------------------	-----------

Outling Drawing (Unit:mm)

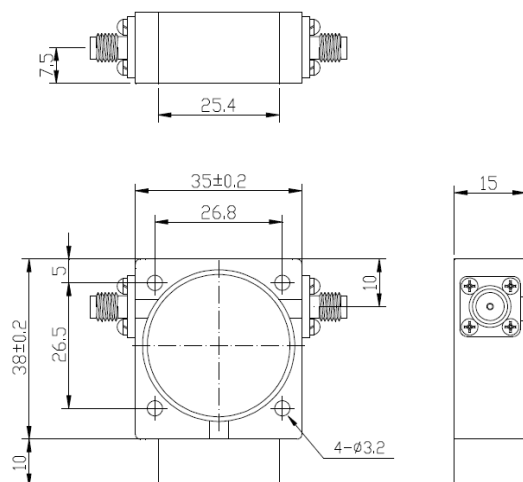

Test Report

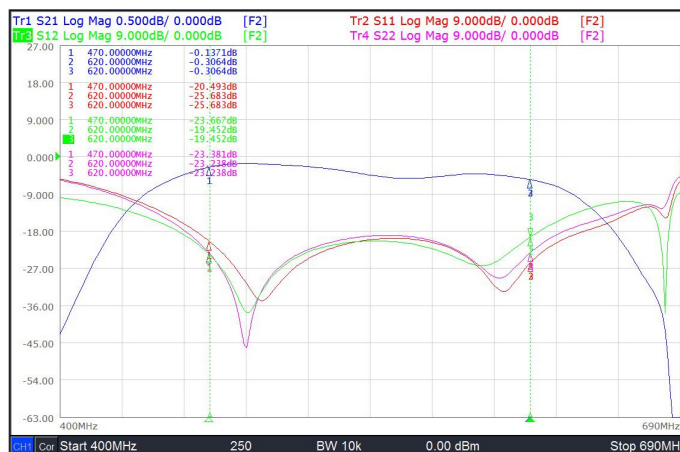

All Specification Changed Without Notification.