



0169A00180003W

RF Switch Box

18GHz SMA SP4T Multiple Port RF Switch Box manual + programing

Features

- ✔ High Repeatability
- ✔ Low VSWR



Electrical Specifications



Frequency	18GHz
VSWR	1.3:1(Max.)@DC-8GHz
	1.4:1(Max.)@8-12GHz
	1.5:1(Max.)@12-18GHz
Insertion Loss	0.3dB(Max.)@DC-8GHz
	0.4dB(Max.)@8-12GHz
	0.5dB(Max.)@12-18GHz
Isolation(Ports)	80dB(Min.)@DC-8GHz
	70dB(Min.)@8-18GHz
DC Power	12V/2A(24W)
RF Power	50W
Impedance	50Ohm
Operating Life	1,000,000 Cycles (Min.)
Switching Time	15ms
Coaxial Connection	SMA Female(1 input/4 out)
Control Interface:	LAN
Operating Voltage	DC12V/290mA

Environmental

Operating Temperature	-25~65°C
-----------------------	----------

支援程式化語言: c++, c#, Java, Delphi, VB, PHP, Python等, 有支援Socket連線及傳送指令功能的程式都可以適用。

Test Report

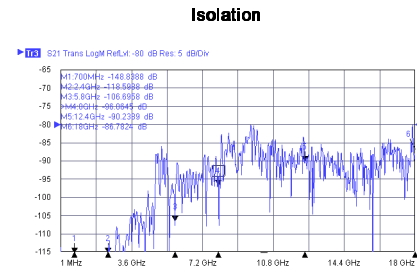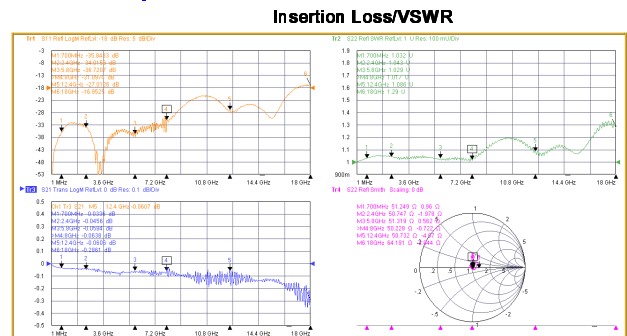

Outling Drawing (Unit:mm)

