





0230A05000401L

Bias Tee

**0.1-4200MHz RF+DC: SMA(M),
RF: SMA(F), DC: Solder Pin 50V
0.5A Bias Tee**

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	0.1-4200MHz
VSWR	1.3:1(Max.)
Insertion Loss	1.5dB(Max.)
Isolation	25dB(Min.)
DC Voltage	50VDC(Max.)
DC Current	0.5A(Max.)
RF Power	1W(Max.)
Impedance	50Ohm
Connection	RF Input Port:SMA Male RF Output Port:SMA Female DC Input Port:Solder Pin


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Test Report

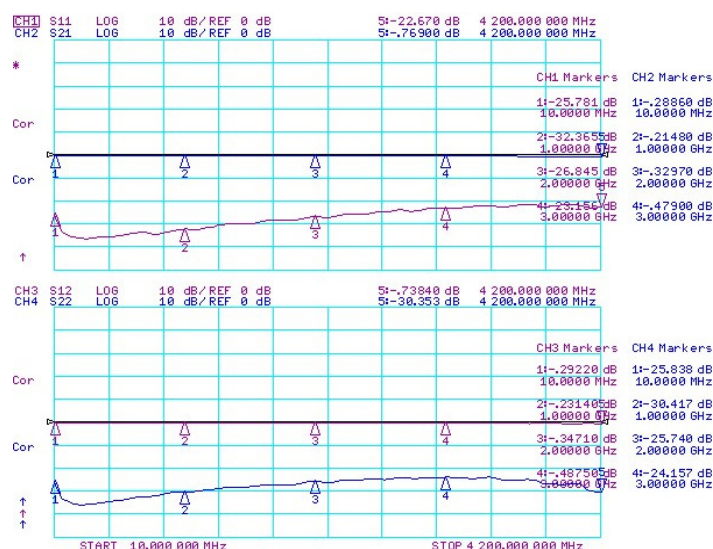

Outling Drawing (Unit:mm)

