




0230A05050802L

Bias Tee

**0.005-8GHz RF+DC:SMA(F), RF:
SMA(F), DC: Solder 50V 1A Bias Tee**

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	5-8000MHz
VSWR	1.4:1(Max.)
Insertion Loss	1.2dB(Max.)
DC Voltage	50VDC(Max.)
DC Current	1A(Max.)
RF Power	2W(Max.)
RF-DC Isolation	30dB(Min.)
Impedance	50Ohm
Connection	RF Input Port:SMA Female RF Output Port:SMA Female DC Input Port:Solder Pin



Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Outling Drawing (Unit:mm)

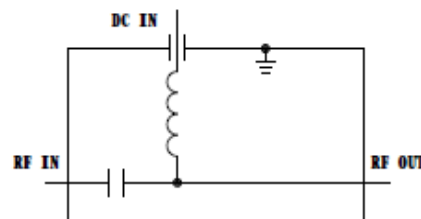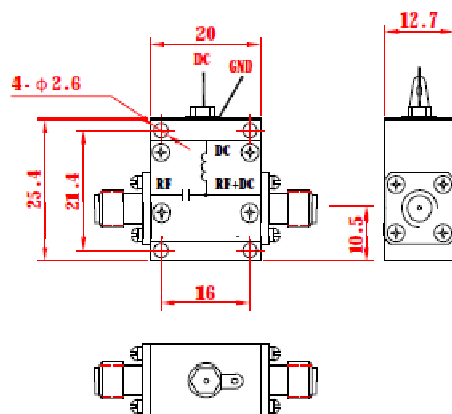

All Specification Changed Without Notification.