



90193-XF19121-7

Adapter

8GHz 50Ω IP I(F)-MMCX(J) Adapter/Gold

Features

- ✓ High Repeatability
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-8GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection 1	MMCX Jack
Connection 2	IP I Female(Receptacle)

Mechanical

Durability	500 Cycles (Min.)
Mating	1/4"-36 Threaded


Environmental

Operating Temperature	-65°C~165°C
-----------------------	-------------

Material

Part	Material	Plated
IP Body	Stainless Steel	Passivated
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
MMCX Body	Brass	Gold

Test Report

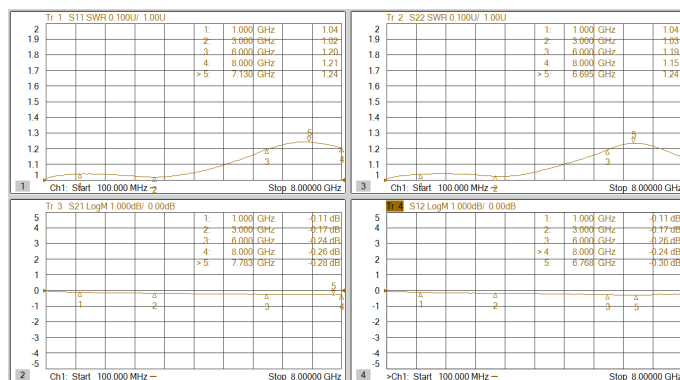

Note.

1. 測試數據為實驗室測試值
2. 產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為：

Outling Drawing (Unit:mm) Tolerance:±0.1mm

