

DC-6GHZ 4WAY SMA RESISTIVE DIVIDER

RATED TO 2W

P/N0.STI08-0061



SPECIFICATION


Frequency	DC-6GHz
Isolation:	11dB(Typ.)
Insertion Loss:	14dB(Max.)
VSWR:	1.6:1(Max.)
Power :	2W
Amplitude Unbalance:	±0.6dB(Max.)
Phase Unbalance:	±6°(Max.)
Impedance:	50Ohm
Durability:	500 Cycles
Operating Temp.:	-55~85°C

MATERIAL LIST

Part	Material	Plated
Connector Body	Brass	Nickel

OUTLING DRAWING

Unit:mm [inch]

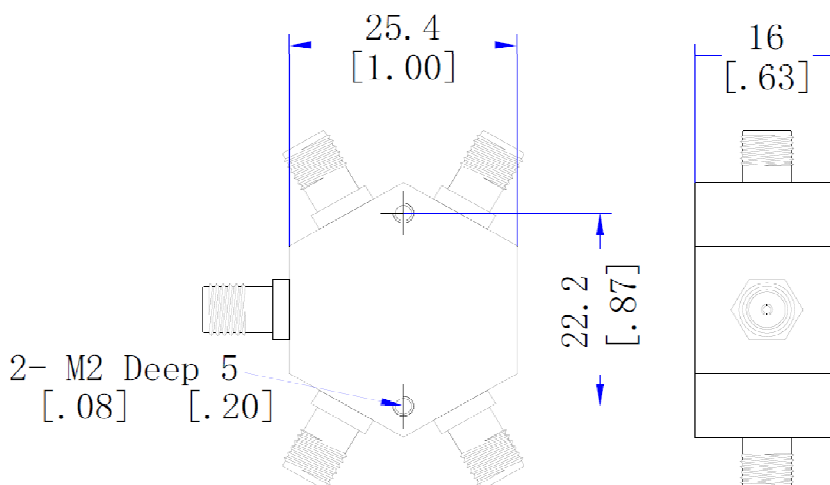

TESTING DATA (100% S-PARAMETER TESTED)

