

Part No. WADP-29M29M-01

40GHz 2.92mm(M)-2.92mm(M) 50Ω Adapter/Stainless Steel



Features:

- High repeatability
- Low VSWR



Electrical Specification

Frequency	DC-40GHz
Impedance	50 Ohm
V.S.W.R	1.15:1 Max.
Connector Type	2.92mm Male – 2.92mm Male

Mechanical Specification

Durability	500Cycles
------------	-----------

Material Specification


Housing	Type 303 Stainless Steel-Polished & Passivated
Center Contact	Gold Plated Beryllium Copper
Insulator	PEI

Environmental Specification

Operating Temperature	-40~+125°C
-----------------------	------------

Outline

Unit:mm

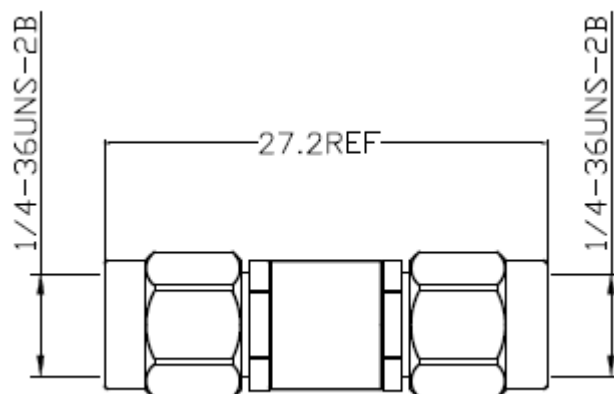

Test Curve

